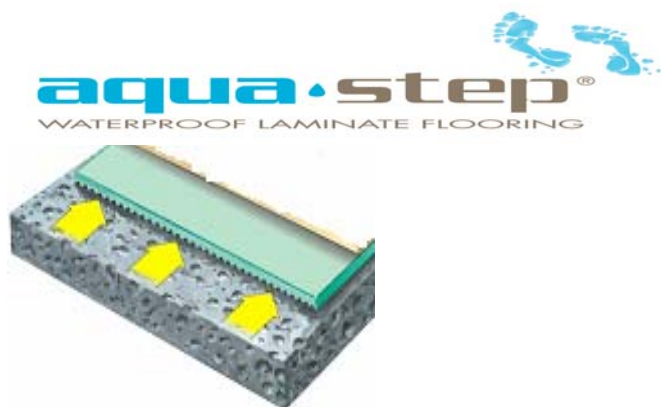

AQUABASE XPS 3MM



General product features

- ▶ outstanding impact sound insulation
- ▶ due to enormous compression strength ideal for laying underneath click laminate
- ▶ excellent walking noise reduction
- ▶ Forest floor effect – lightly sprung, creating enhanced walking comfort on laminate floors
- ▶ compensation of small hollows (up to 2.5 mm)
- ▶ flame-retardant (DIN 4102 B2/ DIN EN 13501-1 Efl)

Technical data

- | | |
|--------------------------------------|--|
| ▶ Article-No. | Aquabase XPS 3mm |
| ▶ Material: | extruded polystyrene (XPS) |
| ▶ Format: | 0.59 x 0.79 cm |
| ▶ packing unit: | 15 panels/ bag (=7 m ²) |
| ▶ Order unit: | 44 bags/ pallet |
| ▶ Thickness: | 3 mm |
| ▶ compression strength | 5 t/m ² |
| ▶ Fire protection classification: | B2 (DIN 4102)/ Euronorm DIN EN 13501-1 Efl |
| ▶ Thermal conduction resistance: | 0.095 m ² K/W |
| ▶ Deflection temperature under load: | up to 70 ° C |
| ▶ Impact sound insulation: | 22 dB (ISO 140-8) |
| ▶ Walking noise reduction: | 6 dB (IHD 431) |
-
-